


TLG FLAIL (medium heavy type)



www.lipa-srl.it info@lipa-srl.it 65010 Spoltore (PE) - Italy Via Castellani (ang. Via Mare Adriatico) **Tel. +39 085 4971431 Fax +39 085 4973170** 





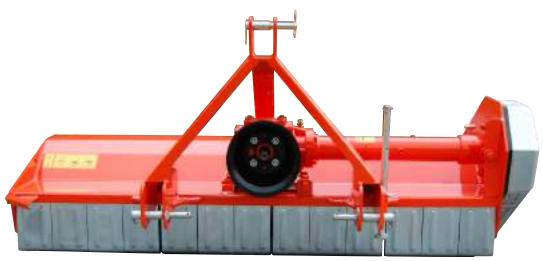

## STANDARD EQUIPMENT

- three-point hitch
- rear rubber protection
- front protection with galvanised strips
- stabiliser foot
- gearbox with internal freewheel
- cardan shaft
- cardan protection boot
- rotor with smooth hammers
- belt transmission
- rear heightadjustable roller with scraper
- internal counterframe
- series of internal counter-elements
- special powder or liquid painting (primer and enamel)

The TLG Flail is a piece of equipment used for the shredding of grass and branches from the pruning of vineyards and orchards. It has a three-point hitch and can be applied to crawler and wheeled tractors.

Mod.	(B/H/Z)		Kg	(Hp-kw) *	(g/min.)	2	<b>Ø</b> . D. Rotor	
TLG-120	1360/800/870	1240	340	25/30-18/22	540	12	140	3
TLG-130	1460/800/870	1340	360	25/30-18/22	540	13	140	3
TLG-140	1560/800/870	1440	380	25/30-18/22	540	14	140	3
TLG-150	1660/800/870	1540	400	30/35-22/26	540	15	140	3
TLG-160	1760/800/870	1640	410	30/35-22/26	540	16	140	3
TLG-180	1960/800/870	1840	440	35/40-26/29	540	18	140	4
TLG-200	2120/800/870	2000	470	40/45-29/33	540	20	140	4

The horsepower shown in the table are indicative and express the power required by the flail for its operation.

## **ACCESSORIES ON REQUEST**

- 1. Pair of side skids
- 2. Inter-row disc Spring-loaded Hydraulic probe
- **3.** Front rubber protection on the strips







